

Artikel Nr.: 348099

Deckenaufbauleuchte, Draconis, Weißaluminium RAL 9006, 220-240V AC/50Hz, 45W/ 55W/ 72W, Warmweiß + Neutralweiß



Technische Daten

Charakteristik

Material	Aluminium Druckguss
Farbe	Weißaluminium RAL 9006
Optik	
im Lieferumfang	

Elektrische Daten

Leistung	72,00 W
Eingangsspannung	220-240V AC/50Hz
Eingangsstrom	
Fassung / Sockel	
Anzahl Sockel	
Netzgerät	inkl. LED-Netzgerät
Ansteuerung	nicht dimmbar
Anschlussmöglichkeit	Klemme
Schutzklasse I, II, III	I

Lichttechnische Eigenschaften

Leuchtmittel	Lichtquelle fest
Lichtfarbe	Warmweiß + Neutralweiß
Farbtemperatur	2700 / 3500 / 4000 K
Lichtstrom	8215 lm
Abstrahlwinkel	60°
LED Typ	SMD
LED Anzahl	198
Strahlungsverteilung	582 nm



Artikel Nr.: 348099

Deckenaufbauleuchte, Draconis, Weißaluminium RAL 9006, 220-240V AC/50Hz, 45W/ 55W/ 72W, Warmweiß + Neutralweiß

Lichtrichtung


Dreh- und Schwenkbereich	feststehend
Neigungswinkel	
Abstrahlverhalten	
Reflektor / Linse	symmetrisch

Abmessungen und Gewicht

Länge (mm)	577,60
Breite (mm)	188,60
Höhe (mm)	71,00
Durchmesser (mm)	0,00
Deckenabhängung (mm)	0,00
Gewicht	2634 g

Sockelmaß

Länge (mm)	102,00
Breite (mm)	88,00
Höhe (mm)	25,00
Durchmesser (mm)	0,00

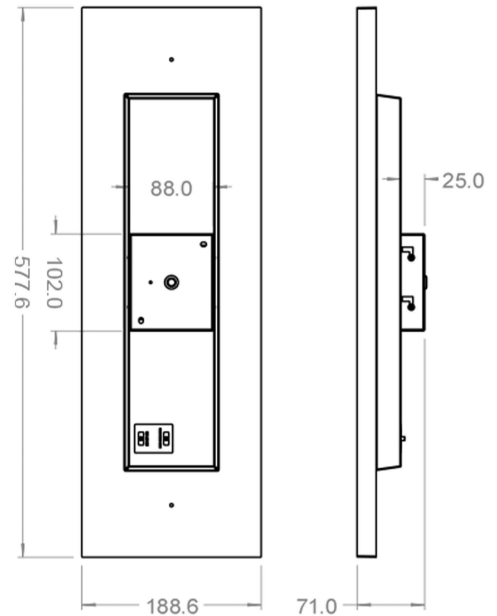

Artikel Nr.: 348099

Deckenaufbauleuchte, Draconis, Weißaluminium RAL 9006, 220-240V AC/50Hz, 45W/ 55W/ 72W, Warmweiß + Neutralweiß

Grenzwerte

Betriebstemperatur	-20°C - +30°C
Lagertemperatur	-30°C - +60°C
IP - Schutzart	IP20

Allgemeine Eigenschaften

Umwelteigenschaften

Energieeffizienzklasse	E
Energieverbrauch	72 kWh/1000h

Lebensdauer

Lebensdauer	50000 h
Lichtstrom Ende Lebensdauer	0,70
Schaltzyklen	25000

EEI	Dieses Produkt enthält eine Lichtquelle der Energieeffizienzklasse E
IP20	Schutz gegen das Eindringen von Fremdkörper > 50 mm. Kein Schutz gegen das Eindringen von Wasser.
	Leuchte der Schutzklasse I bei der der Schutz gegen elektrischen Schlag nicht allein auf der Basisisolierung beruht, sondern die eine zusätzliche Sicherheitsvorkehrung derart enthält, dass berührbare leitfähige Teile mit Mitteln zum Anschluss an den Schutzleiter der festen Installation ausgerüstet sind, so dass im Fehlerfall der Basisisolierung berührbare leitfähige Teile nicht aktiv werden können.

Article no.: 348099

Surface mounted ceiling lamp, Draconis, White aluminium RAL 9006, 220-240V AC/50Hz, 45W/ 55W/ 72W, warm white + neutral white



Technical Data

General Characteristics

Material	aluminum die casting
Colour	White aluminium RAL 9006
Optics	
included in delivery	

Electrical Characteristics

Power	72,00 W
Input voltage	220-240V AC/50Hz
Input current	
Base (standard designation)	
Number of bases	
Power supply unit	incl. LED-power supply unit
Electronically reversible	not dimmable
Connection possibility	clamp
Protection class I, II, III	I

Light Technical Data

Bulb	Lichtquelle fest
Colour Designation	warm white + neutral white
Colour temperature	2700 / 3500 / 4000 K
Luminous flux	8215 lm
Beam angle	60°
LED type	SMD
LED quantity	198
Spectral power distribution	582 nm



Article no.: 348099

Surface mounted ceiling lamp, Draconis, White aluminium RAL 9006, 220-240V AC/50Hz, 45W/ 55W/ 72W, warm white + neutral white

Light Direction


Rotating and tilting range	fixed
Angle of inclination	
Radiation direction	
Reflector / lense	symmetrisch

Dimensions & Weight

Length (mm)	577,60
Width (mm)	188,60
Height (mm)	71,00
Diameter (mm)	0,00
Suspensions from ceiling (mm)	0,00
Product Weight	2634 g

Base dimensions

Length (mm)	102,00
Width (mm)	88,00
Height (mm)	25,00
Diameter (mm)	0,00

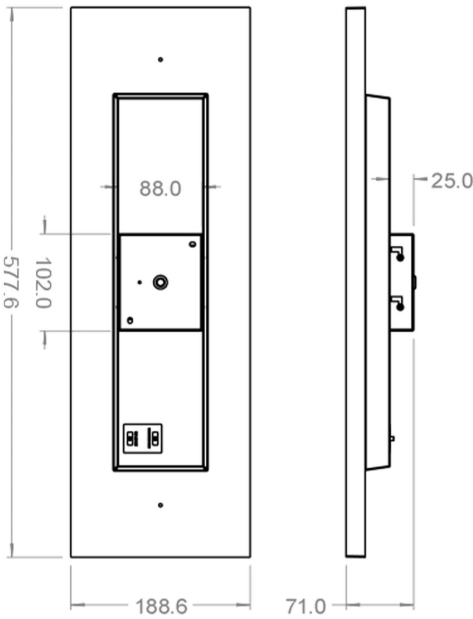

Article no.: 348099

Surface mounted ceiling lamp, Draconis, White aluminium RAL 9006, 220-240V AC/50Hz, 45W/ 55W/ 72W, warm white + neutral white

Absolute maximum ratings

Working temperature	-20°C - +30°C
Storage temperature	-30°C - +60°C
IP - Code	IP20

General product data**Environmental Characteristics**

Energy label	E
Energy consumption	72 kWh/1000h

Lifespan

Lamp life time	50000 h
Luminous flux (end of lifetime)	0,70
Number of switching cycles	25000

EEI	This product contains a light source of energy efficiency class E
IP20	Protection against penetration of foreign objects > 50 mm. No protection against penetration of water.
	Lightings of Protection Class I in which the protection against electric shock is not based solely on isolation, but an additional safety measure contains such a way that accessible conductive parts are equipped with means for connection to the protective conductor of the fixed installation, so that in case of failure of the basic insulation exposed conductive parts cannot be active.