

Artikel Nr.: 565067

Deckeneinbauleuchte, COB 95, Signalweiß RAL 9003, 26-27V DC, Warmweiß

Technische Daten

Charakteristik

Material	Aluminium
Farbe	Signalweiß RAL 9003
Optik	
im Lieferumfang	2 Gläser (klar, satiniert)



Elektrische Daten


Leistung	10,00 W
Eingangsspannung	26-27V DC
Eingangsstrom	350 mA
Fassung / Sockel	
Anzahl Sockel	
Netzgerät	exkl. LED-Netzgerät
Ansteuerung	Phasenanschnitt oder Phasenabschnitt
Anschlussmöglichkeit	offene Kabel
Schutzklasse I, II, III	III

Artikel Nr.: 565067

Deckeneinbauleuchte, COB 95, Signalweiß RAL 9003, 26-27V DC, Warmweiß

Lichtrichtung

Dreh- und Schwenkbereich	schwenkbar
Neigungswinkel	25°
Abstrahlverhalten	
Reflektor / Linse	symmetrisch

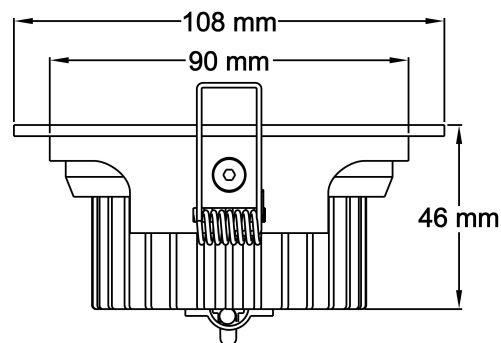

Abmessungen und Gewicht

Länge	0,00
Breite	0,00
Höhe	46,00
Durchmesser	108,00
Einbautiefe	50,00
Gewicht	270 g

Ausschnittsmaß

Länge	0,00
Breite	0,00
Durchmesser	95,00

Artikel Nr.: 565067

Deckeneinbauleuchte, COB 95, Signalweiß RAL 9003, 26-27V DC, Warmweiß

Grenzwerte

Betriebstemperatur	-5°C - +40°C
Lagertemperatur	-10°C - +60°C
IP - Schutzart	IP20

EEI	Dieses Produkt enthält eine Lichtquelle der Energieeffizienzklasse F
IP20	Schutz gegen das Eindringen von Fremdkörper > 50 mm. Kein Schutz gegen das Eindringen von Wasser.
	Leuchte der Schutzklasse III Leuchte, bei der der Schutz gegen elektrischen Schlag auf der Anwendung der Schutzkleinspannung (SELV) beruht und in der Spannungen höher als SELV nicht erzeugt werden.
	Aufgrund des komplexen Herstellungsprozesses von LED stellen die angegebenen Werte nur rein statistische Größen dar und müssen nicht zwingend den tatsächlichen Parametern jedes einzelnen LED-Moduls entsprechen, sondern können von den typischen Werten abweichen.

Article no.: 565067

Built in ceiling lamp, COB 95, Signal white RAL 9003, 26-27V DC, warmwhite

Technical Data

General Characteristics

Material	aluminum
Colour	Signal white RAL 9003
Optics	
included in delivery	2 glasses (clear, satined)



Electrical Characteristics

Power	10,00 W
input voltage	26-27V DC
input current	350 mA
Base (standard designation)	
Number of bases	
Power supply unit	excl. LED-power supply unit
Electronically reversible	leading edge or trailing edge
Connection possibility	wire with open ends
Protection class I, II, III	III

Article no.: 565067

Built in ceiling lamp, COB 95, Signal white RAL 9003, 26-27V DC, warmwhite

Light Direction


Rotating and tilting range	swivel
Angle of inclination	25°
Radiation direction	
Reflector / lense	symmetrisch

Dimensions & Weight

Length	0,00
Width	0,00
Height	46,00
Diameter	108,00
Mounting Depth	50,00
Product Weight	270 g

Cut-out dimensions

Length	0,00
Width	0,00
Diameter	95,00

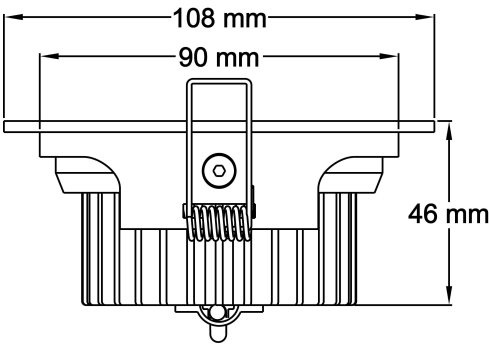

Article no.: 565067

Built in ceiling lamp, COB 95, Signal white RAL 9003, 26-27V DC, warmwhite

Absolute maximum ratings

Working temperature	-5°C - +40°C
Storage temperature	-10°C - +60°C
IP - Code	IP20

EEI	This product contains a light source of energy efficiency class F
IP20	Protection against penetration of foreign objects > 50 mm. No protection against penetration of water.
	Lightings of Protection Class III Luminaire in which protection against electric shock relies on supply at safety extra-low voltage (SELV) and in which voltages higher than those of SELV are not generated.
	Because of the complex manufacturing process of the LED the above shown data are just a statistical size, which is not forced to be the realistic data of every LED.