

Artikel Nr.: 620031

Pendelleuchte, Set, LED Event-Panel Transparent, 63 W, RGB/4000 K, Schwarz, Schwarz, 24 V/DC, RGB/Neutralweiß

Technische Daten

Charakteristik

Material	Aluminium
Farbe	Schwarz
Optik	Transparent/ Transparent
im Lieferumfang	1x Baldachin mit Abhängung



Elektrische Daten

Leistung	63,0 W
Eingangsspannung	24 V/DC
Bemessungsstrom	
Fassung / Sockel	
Anzahl Sockel	
Netzgerät	Nein
Ansteuerung	dimmbar über optionalen Controller
Anschlussmöglichkeit	Klemme
Schutzklasse I, II, III	III

Lichttechnische Eigenschaften

Leuchtmittel	LED; Lichtquelle nicht wechselbar
Lichtfarbe	RGB/Neutralweiß
Farbtemperatur	4000 K
Lichtstrom	4265 lm
Abstrahlwinkel	150 Grad
LED Typ	SMD
LED Anzahl	448
Strahlungsverteilung	



Artikel Nr.: 620031

Pendelleuchte, Set, LED Event-Panel Transparent, 63 W, RGB/4000 K, Schwarz, Schwarz, 24 V/DC, RGB/Neutralweiß

Lichtrichtung


Dreh- und Schwenkbereich	
Neigungswinkel	
Abstrahlverhalten	Oben;Unten
Reflektor / Linse	

Abmessungen und Gewicht

Länge (mm)	1195,00
Breite (mm)	295,00
Höhe (mm)	13,80
Durchmesser (mm)	0,00
Deckenabhängung (mm)	3000,00
Gewicht	5700 g

Sockelmaß

Länge (mm)	580,00
Breite (mm)	80,00
Höhe (mm)	45,00
Durchmesser (mm)	0,00

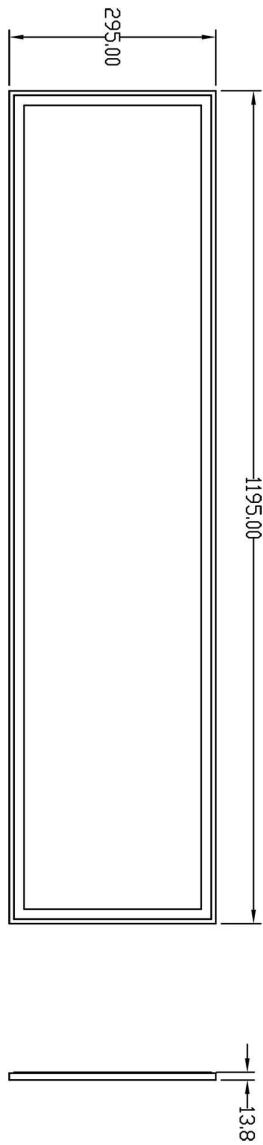

Artikel Nr.: 620031

Pendelleuchte, Set, LED Event-Panel Transparent, 63 W, RGB/4000 K, Schwarz, Schwarz, 24 V/DC, RGB/Neutralweiß

Grenzwerte

Betriebstemperatur	-20 bis 40 °C
Lagertemperatur	-30 bis 60 °C
IP - Schutzart	IP 20

Allgemeine Eigenschaften

Umwelteigenschaften

Energieeffizienzklasse	E
Energieverbrauch	63 kWh/1000h

Lebensdauer

Bemessungslebensdauer L70/B50	30000 h
Lichtstrom Ende Lebensdauer	0,70
Schaltzyklen	15000

EEI	Dieses Produkt enthält eine Lichtquelle der Energieeffizienzklasse E
IP 20	Schutz gegen das Eindringen von Fremdkörper > 50 mm. Kein Schutz gegen das Eindringen von Wasser.
	Leuchte der Schutzklasse III Leuchte, bei der der Schutz gegen elektrischen Schlag auf der Anwendung der Schutzkleinspannung beruht. In dieser Leuchte darf auch keine Spannung höher als Schutzkleinspannung erzeugt werden.
	Die Lichtquelle dieser Leuchte darf nur vom Hersteller oder einem von ihm beauftragten Servicetechniker oder einer vergleichbar qualifizierten Person ersetzt werden

Article no.: 620031

Pendant lamp, Set, LED Event-Panel Transparent, 63 W, RGB/4000 K, black, Black, 24 V/DC, RGB/neutral white

Technical Data

General Characteristics

Material	Aluminium
Colour	Black
Optics	Transparent / Transparent
included in delivery	



Electrical Characteristics

Power	63,0 W
Input voltage	24 V/DC
Input current	
Base (standard designation)	
Number of bases	
Power supply unit	excl. LED-power supply unit
Electronically reversible	dimnable via optional controller
Connection possibility	Clamp
Protection class I, II, III	III

Light Technical Data

Bulb	LED;Lichtquelle nicht wechselbar
Colour Designation	RGB/neutral white
Colour temperature	4000 K
Luminous flux	4265 lm
Beam angle	150 Grad
LED type	SMD
LED quantity	448
Spectral power distribution	



Article no.: 620031

Pendant lamp, Set, LED Event-Panel Transparent, 63 W, RGB/4000 K, black, Black, 24 V/DC, RGB/neutral white

Light Direction


Rotating and tilting range	
Angle of inclination	
Radiation direction	Oben;Unten
Reflector / lense	

Dimensions & Weight

Length (mm)	1195,00
Width (mm)	295,00
Height (mm)	13,80
Diameter (mm)	0,00
Suspensions from ceiling (mm)	3000,00
Product Weight	5700 g

Base dimensions

Length (mm)	580,00
Width (mm)	80,00
Height (mm)	45,00
Diameter (mm)	0,00

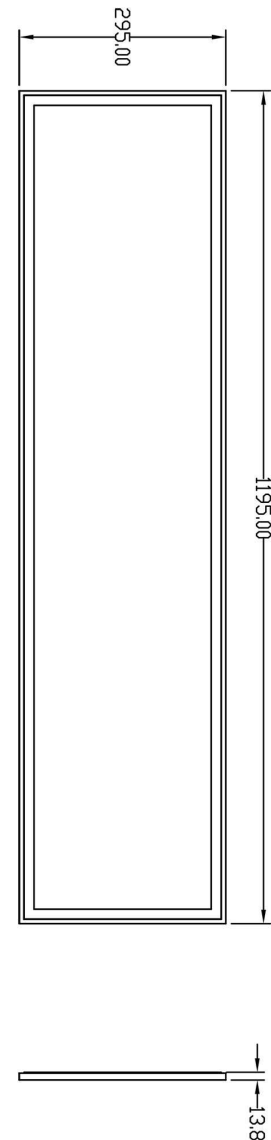

Article no.: 620031

Pendant lamp, Set, LED Event-Panel Transparent, 63 W, RGB/4000 K, black, Black, 24 V/DC, RGB/neutral white

Absolute maximum ratings

Working temperature	-20 bis 40 °C
Storage temperature	-30 bis 60 °C
IP - Code	IP 20

General product data

Environmental Characteristics

Energy label	E
Energy consumption	63 kWh/1000h

Lifespan

Rated Life Time L70 / B50	30000 h
Luminous flux (end of lifetime)	0,70
Number of switching cycles	15000

EEI	This product contains a light source of energy efficiency class E
IP 20	Protection against penetration of foreign objects > 50 mm. No protection against penetration of water.
	Lightings of Protection Class III Luminaire in which protection against electric shock relies on supply at safety extra-low voltage (SELV) and in which voltages higher than those of SELV are not generated.
	The light source of this luminaire may only be replaced by the manufacturer or by a service technician appointed by him or by a comparable qualified person