

Artikel Nr.: 731129

Wandaufbauleuchte, Linear II Double, Basaltgrau RAL 7012, 220-240V AC/50-60Hz, Warmweiß

Technische Daten

Charakteristik

Material	Aluminium Druckguss
Farbe	Basaltgrau RAL 7012
Optik	
im Lieferumfang	4x Schrauben mit Dübel, 1x Innensechskantschlüssel 5 x Dichtungen



Elektrische Daten

Leistung	20,00 W
Eingangsspannung	220-240V AC/50-60Hz
Eingangsstrom	
Fassung / Sockel	
Anzahl Sockel	
Netzgerät	inkl. LED-Netzgerät
Ansteuerung	nicht dimmbar
Anschlussmöglichkeit	Klemme
Schutzklasse I, II, III	I

Lichttechnische Eigenschaften

Leuchtmittel	Lichtquelle fest
Lichtfarbe	Warmweiß
Farbtemperatur	3000 K
Lichtstrom	1760 lm
Abstrahlwinkel	100°
LED Typ	
LED Anzahl	44
Strahlungsverteilung	582 nm




Artikel Nr.: 731129

Wandaufbauleuchte, Linear II Double, Basaltgrau RAL 7012, 220-240V AC/50-60Hz, Warmweiß

Lichtrichtung

Dreh- und Schwenkbereich	feststehend
Neigungswinkel	90 °
Abstrahlverhalten	2 Side
Reflektor / Linse	

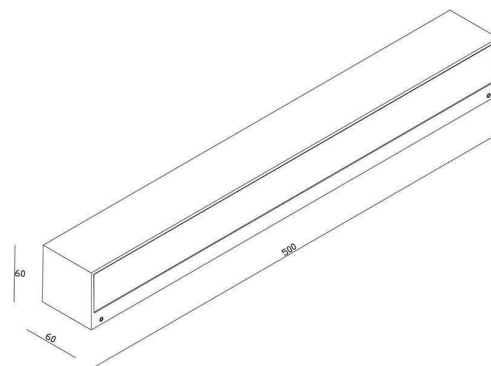

Abmessungen und Gewicht

Länge	500,00
Breite	60,00
Höhe	60,00
Durchmesser	0,00
Gewicht	1820 g

Grenzwerte

Betriebstemperatur	-20°C - +40°C
Lagertemperatur	-10°C - +60°C
IP - Schutzart	IP65

Artikel Nr.: 731129

Wandaufbauleuchte, Linear II Double, Basaltgrau RAL 7012, 220-240V AC/50-60Hz, Warmweiß

Allgemeine Eigenschaften

Umwelteigenschaften	
Energieeffizienzklasse	G
Energieverbrauch	20 kWh/1000h

Lebensdauer

Lebensdauer	30000 h
Lichtstrom Ende Lebensdauer	0,70
Schaltzyklen	15000

EEI	Dieses Produkt enthält eine Lichtquelle der Energieeffizienzklasse G
IP65	Schutz gegen das Eindringen von Staub. (Staubdicht) Geschützt gegen Strahlwasser.
	Leuchte der Schutzklasse I bei der der Schutz gegen elektrischen Schlag nicht allein auf der Basisisolierung beruht, sondern die eine zusätzliche Sicherheitsvorkehrung derart enthält, dass berührbare leitfähige Teile mit Mitteln zum Anschluss an den Schutzleiter der festen Installation ausgerüstet sind, so dass im Fehlerfall der Basisisolierung berührbare leitfähige Teile nicht aktiv werden können.
	Aufgrund des komplexen Herstellungsprozesses von LED stellen die angegebenen Werte nur rein statistische Größen dar und müssen nicht zwingend den tatsächlichen Parametern jedes einzelnen LED-Moduls entsprechen, sondern können von den typischen Werten abweichen.

Article no.: 731129

Surface mounted wall lamp, Linear II Double, Basaltgray RAL 7012, 220-240V AC/50-60Hz, warmwhite

**Technical Data****General Characteristics**

Material	aluminum die casting
Colour	Basaltgray RAL 7012
Optics	
included in delivery	4x screws with dowels, 1x hexagon socket wrench 5 x seals

Electrical Characteristics

Power	20,00 W
Input Voltage	220-240V AC/50-60Hz
Input current	
Base (standard designation)	
Number of Bases	
Power supply unit	incl. LED-power supply unit
Electronically reversible	not dimmable
Connection possibility	clamp
Protection class I, II, III	I

Light Technical Data

Bulb	Lichtquelle fest
Colour Designation	warmwhite
Colour temperature	3000 K
Luminous flux	1760 lm
Beam angle	100°
LED type	
LED quantity	44
Spectral power distribution	582 nm




Article no.: 731129

Surface mounted wall lamp, Linear II Double, Basaltgray RAL 7012, 220-240V AC/50-60Hz, warmwhite

Light Direction

Rotating and tilting range	fixed
Angle of inclination	90 °
Radiation direction	2 Side
Reflector / lense	

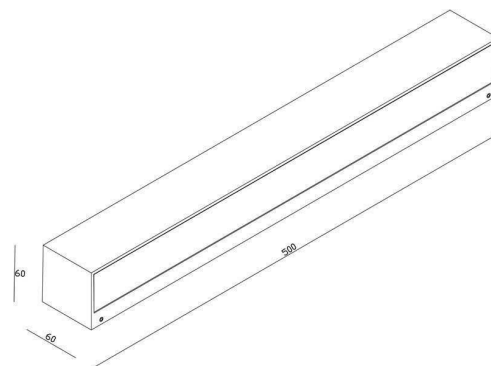**Dimensions & Weight**

Length	500,00
Width	60,00
Height	60,00
Diameter	0,00
Product Weight	1820 g

Absolute maximum ratings

Working temperature	-20°C - +40°C
Storage temperature	-10°C - +60°C
IP - Code	IP65

Article no.: 731129

Surface mounted wall lamp, Linear II Double, Basaltgray RAL 7012, 220-240V AC/50-60Hz, warmwhite

Environmental Characteristics

Energy label	G
Energy consumption	20 kWh/1000h

Lifespan

Lamp life time	30000 h
Luminous flux (end of lifetime)	0,70
Number of switching cycles	15000

EEI	This product contains a light source of energy efficiency class G
IP65	Protection against penetration of dust. (complete dust protection) Protection against penetration of water jets.
	Lightings of Protection Class I in which the protection against electric shock is not based solely on isolation, but an additional safety measure contains such a way that accessible conductive parts are equipped with means for connection to the protective conductor of the fixed installation, so that in case of failure of the basic insulation exposed conductive parts cannot be active.
	Because of the complex manufacturing process of the LED the above shown data are just a statistical size, which is not forced to be the realistic data of every LED.